


NOTES:  
 - SECURE ALL LEADS TO PREVENT INTERFERENCE WITH MOVING PARTS.  
 - STATOR LEADS TO BE CONNECTED TO TERMINAL BOARD PER ORIENTATION SHOWN TO ENSURE LEADS ARE KEPT FROM BORE.

**CONNECTIONS**

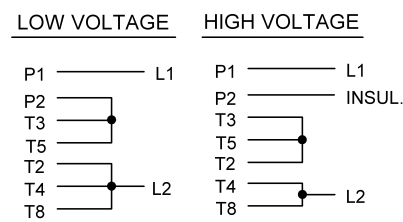

ROTATION:  
 CCW SWITCH END REVERSIBLE  
 TO REVERSE ROTATION INTERCHANGE  
 T5 AND T8 LEADS

REV. B

NIDEC CONFIDENTIAL  
 NIDEC MOTOR CORPORATION 25-Sep-13

**C 2P DUAL VOLT REV W/CAP & PROT**

REVISION DESCRIPTION FOR: <b>C8396-12</b>	SCALE: <b>NONE</b>	UNITS: <b>IN</b>	TITLE: <b>DIAGRAM OF CONNECTIONS</b>	<b>NIDEC MOTOR CORPORATION</b>
CHANGED MARKUP EMERSON TO NIDEC.	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		ISSUED BY: <b>J.G.SALINAS</b>	APPROVED BY: <b>J.I.SALAZAR</b>
MATERIAL:	<b>INCHES</b>	<b>mm</b>	REVISION DATE: <b>25-SEP-2013</b>	
	<b>± .015</b>		CODE: <b>D04</b>	DWG. NO.: <b>762935</b>
	ANGLES: <b>X° = ±1°</b>		REV. NUMBER: <b>B</b>	SHEET NUMBER: <b>1 OF 1</b>
MUST BE COMPLIANT TO ROHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED			DWG. SIZE: <b>B</b>	SOLIDEDGE