


VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	P63AJF-1345	USEM	D1P1ACR	11.39	--	--	--	1	208-230/460	1.25	3.1-3.0/1.5	60	3450	---	NONE	N56C, ODP
002	P63AJH-1348	USEM	D13P2ACR	11.39	--	--	--	1/3	208-230/460	1.35	1.4-1.4/0.7	60	1725	---	NONE	N56C, ODP

SHAFT KEY TAPED TO MOTOR

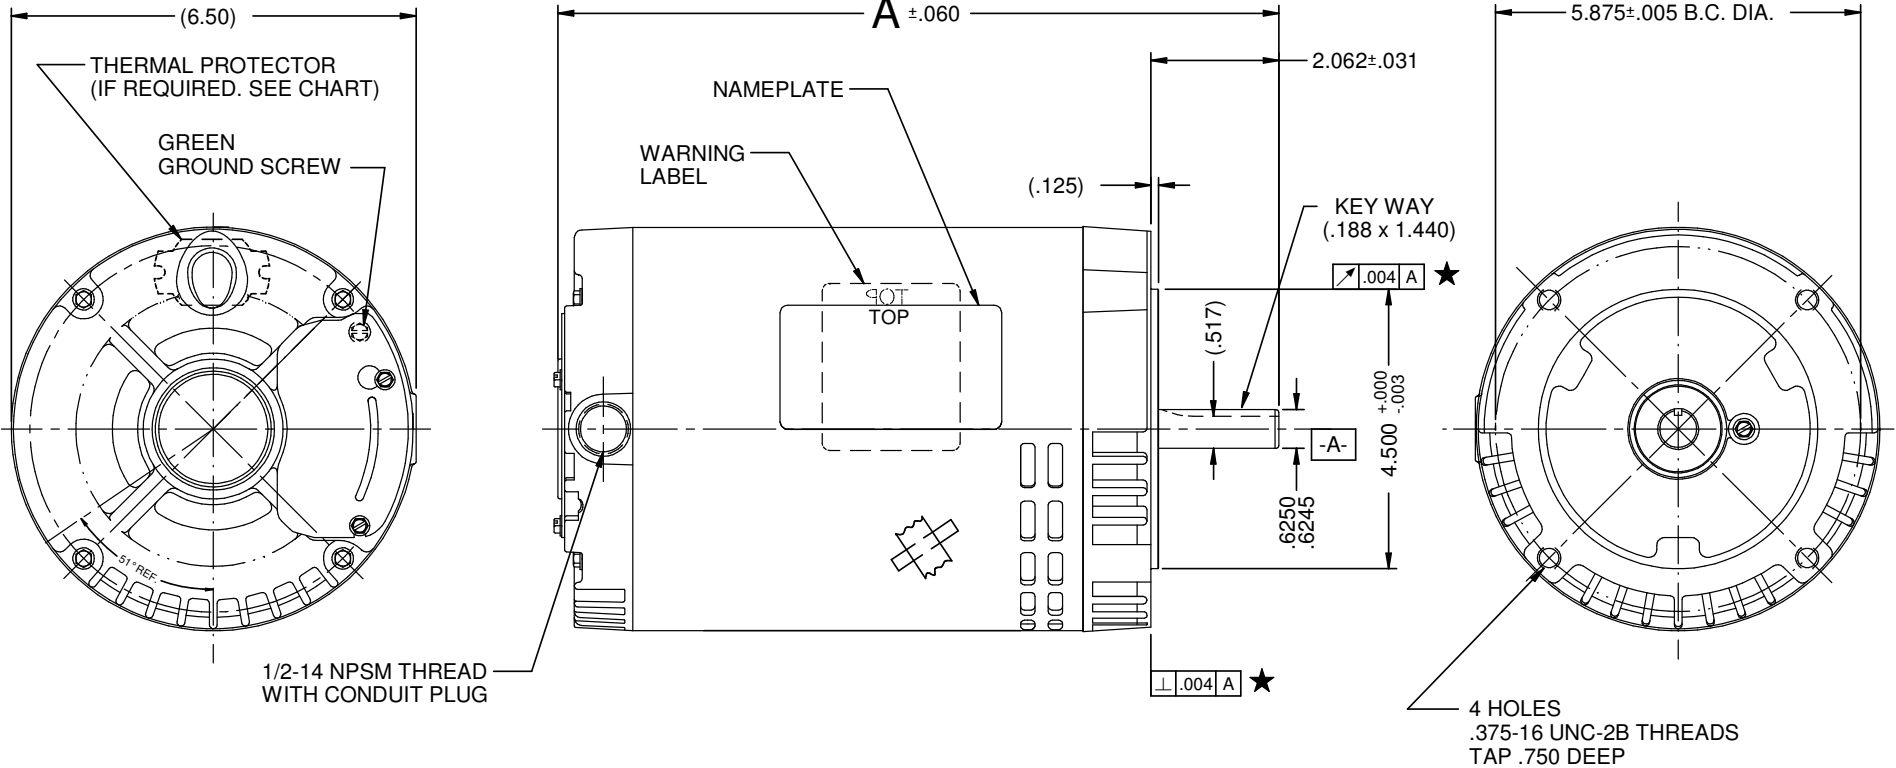

NIDEC MOTOR CORPORATION 21-Oct-15

ROTATION: REVERSIBLE, TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS.

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR:		E23969
ADDED CRITICAL REQ. #2 IN PAGE 3 & 4 AND PAGES 5 & 6.		
ISSUED BY:	ENGINEER APPROVED:	
A. DEL ANGEL	W. GARZA	

TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)	
INCHES .XX = ± .010 .XXX = ± .005	mm
ANGLES X° = ± 1°	

NIDEC MOTOR CORPORATION			
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			
TITLE		CODE	ITEM NO.
CUSTOMER DETAIL DRAWING		V02	804444
REVISION DATE:	REV	SHEET NUMBER	DWG SIZE
08-OCT-15	B	1 OF 6	B