


VAR	MODEL	CUSTOMER	CATALOG NO.	A	B	C	STUD EXTN	HP	VOLTS	SF	AMPS	HZ	RPM	PROTECTOR	BASE REQUIREMENT	DESCRIPTION / REMARKS
001	P63GBW-1481	USEM	WD1P2A	12.32	-----	-----	NO	1.0	208-230/460&190/380	1.15	3.4-3.3/1.8	60&50	1725&1425	NONE	YES	N56.TENV, P86C306WHT

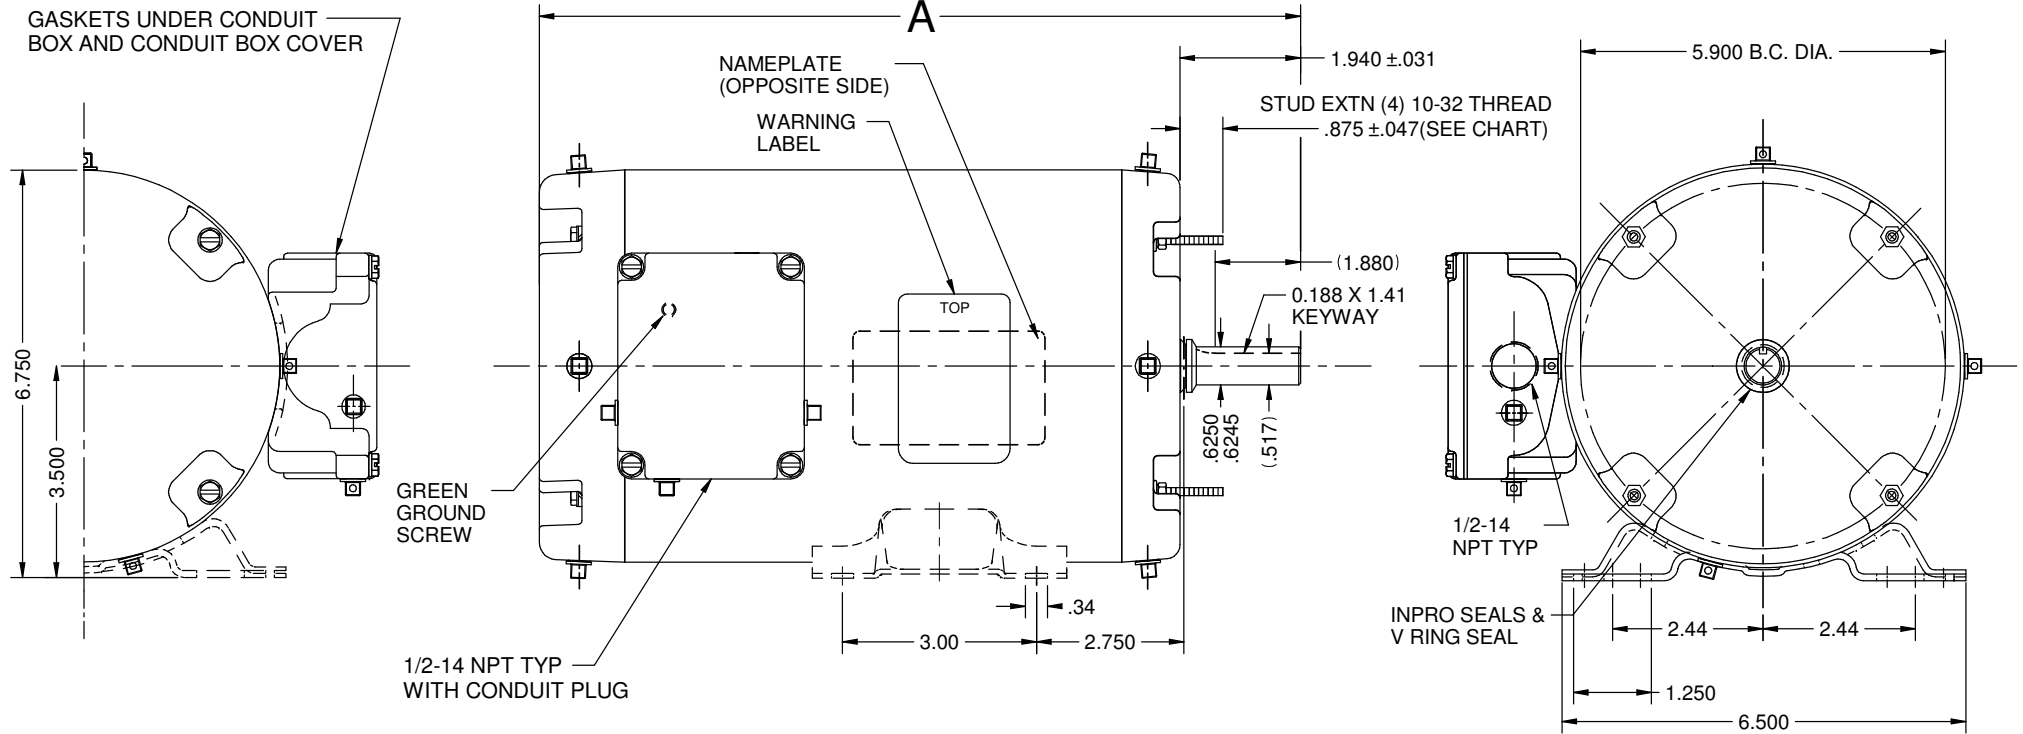

CONNECTIONS

LO VOLTS			HI VOLTS		
④	⑤	⑥	④	⑤	⑥
⑦	⑧	⑨	⑦	⑧	⑨
①	②	③	①	②	③
L1	L2	L3	L1	L2	L3

- NOTES:**
- (11) 1/8-27 NPTF STAINLESS STEEL DRAIN PLUGS; (4) IN C-FACE (4) IN OPPOSITE SHAFT END ENDSHIELD AND (3) IN CONDUIT BOX.
 - 303 STAINLESS STEEL SHAFT KEY SHIPPED WITH MOTOR.

TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS.

REFER TO S.E.I.M. 24-1

NIDEC MOTOR CORPORATION 03-Feb-18		ECO E30489		NIDEC MOTOR CORPORATION				
REVISION RECORD FOR:		DIMENSIONS ARE FOR REFERENCE ONLY		INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION				
CHANGE NOTE TO 1/8-27 NPTF STAINLESS STEEL DRAIN PLUGS.		UNLESS TOLERANCE IS SPECIFIED		TITLE		CODE	ITEM NO.	REVISION DATE:
				CUSTOMER DETAIL DRAWING		V02	810542	03-FEB-18
ISSUED BY:	ENGINEER APPROVED:			REV	SHEET NUMBER	DWG SIZE		
I. GUTIERREZ	M. SCHUETTE			A	1 OF 5	B		