


EFFECTIVE:
02-JAN-14

SUPERSEDES:
18-MAY-11

DIMENSION PRINT
TENV, STAINLESS STEEL FRAME, FOOTLESS
FRAME: 140TC
BASIC TYPE: SSNF

PRINT:
07-2487

SHEET:
1 OF 1

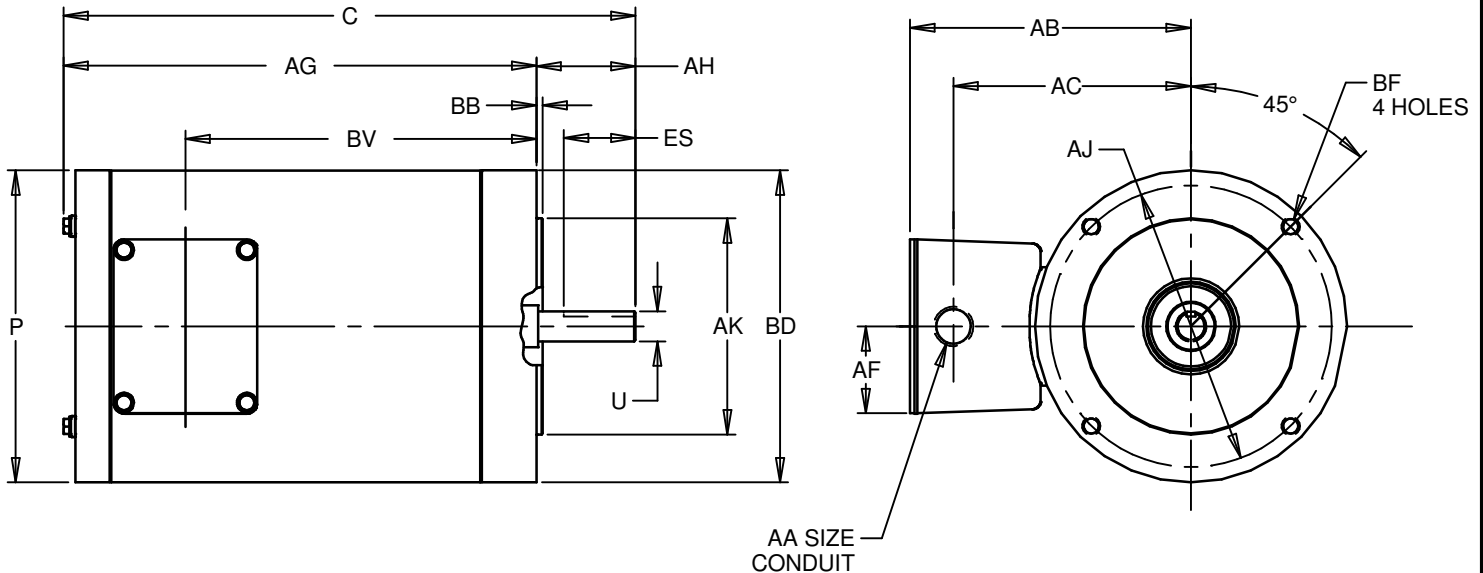

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	C	P ²	U -.0005	AA	AB	AC	AF	AG	AH	AJ
IN	12.00	6.50	.8750	1/2 NPT	6.00	4.94	1.81	9.88	2.12	5.875
mm	305	165	22.225		152	126	46	251	54	149.23

UNITS	AK -.003	BB	BD	BF ³	BV	ES MIN	SQ KEY
IN	4.500	.13	6.500	3/8-16 X .75	5.03	1.78	.188
mm	114.30	3	165.10		128	45	4.78

- 1: ALL ROUGH DIMENSIONS MAY VARY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
- 2: LARGEST MOTOR WIDTH.
- 3: TAP SIZE AND BOLT PENETRATION ALLOWANCE.
- 4: ALL TAPPED HOLES ARE UNIFIED NATIONAL COARSE, RIGHT HAND THREAD.
- 5: TOLERANCES ARE ALL IN INCHES.
- 6: FRAME REFERENCE: 7.750/56/143/145.

TOLERANCES	
FACE RUNOUT	.004 T.I.R
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET	.004 T.I.R
PERMISSIBLE SHAFT RUNOUT	.002 T.I.R

07-2487/B

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION



ISSUED BY	R. KING
APPROVED BY	R. TIMMERMAN

IHP_DP_NMCA (MAR-2011) SOLIDEDGE